


HH5-P


Series General Purpose Relay



HH5 2P



HH5 3P



HH5 4P

Main technical parameter

Contact Ratings		
Contact Ratings	2Z,2D;3Z,3H,3D	4Z,4H,4D
Contact Resistance	50MΩ(1A 6VDC)	
Contact Material	Silver Alloy	
Contact Capacity	5A/250VAC 28VDC	3A,5A/250VAC 28VDC


Specification

Insulation Resistance	500MΩ,500VDC
Dielectric Strength	BCC 1500V 1 min
	BOC 1000V 1 min
	COC 1500V 1 min
Operate Time	20ms/15ms
Terminal Type	Socket
Normal Coil Power	0.9W/1.2VA

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω:±10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω:±10%
5	4.8	0.50	30	6	4.80	1.80	12
6	4.8	0.60	40	12	9.60	3.60	42
12	9.6	1.20	160	24	19.2	7.20	168
24	19.2	2.40	640	48	38.4	14.4	675
48	38.4	4.80	2560	110	96.0	36.0	3500
110	88.0	11.0	12100	220/240	176.0	66.0	14000

Dimension.Bottom View

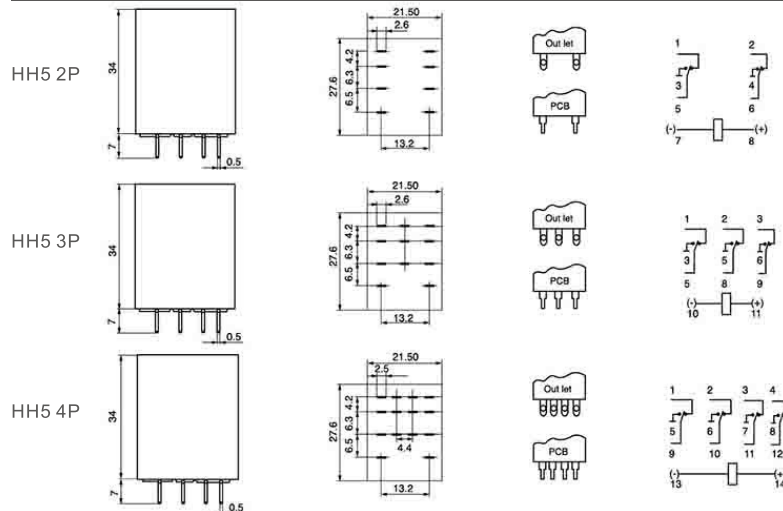

Reference Data

